




MEDIAN SECTION

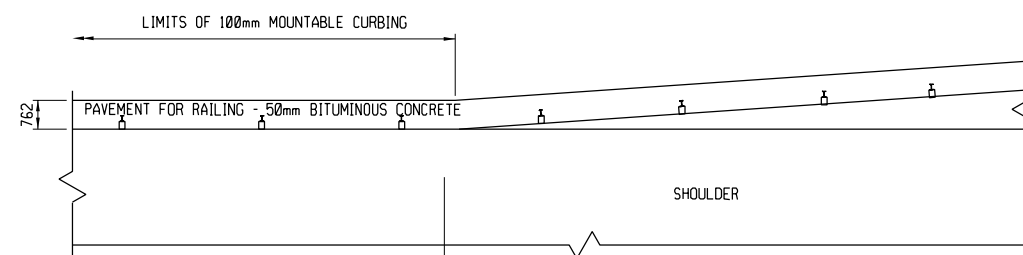

A

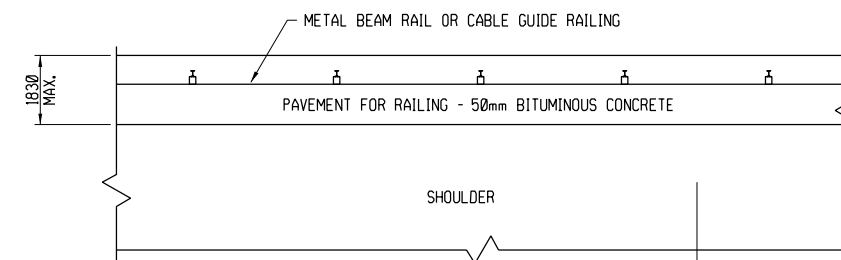


B

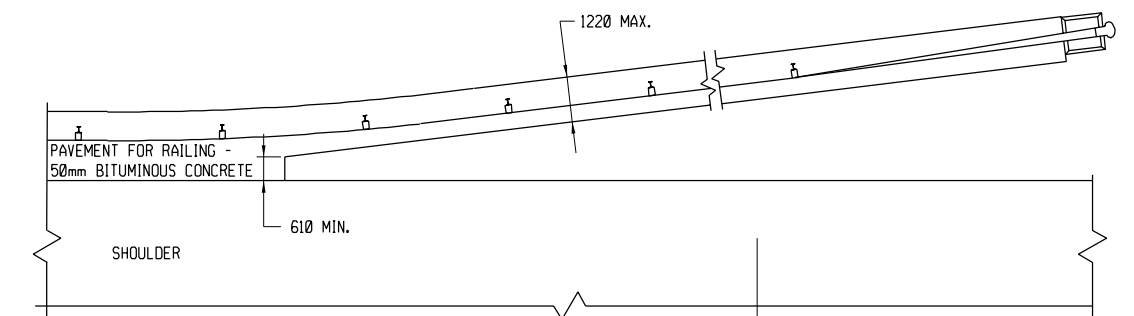


C

PLAN

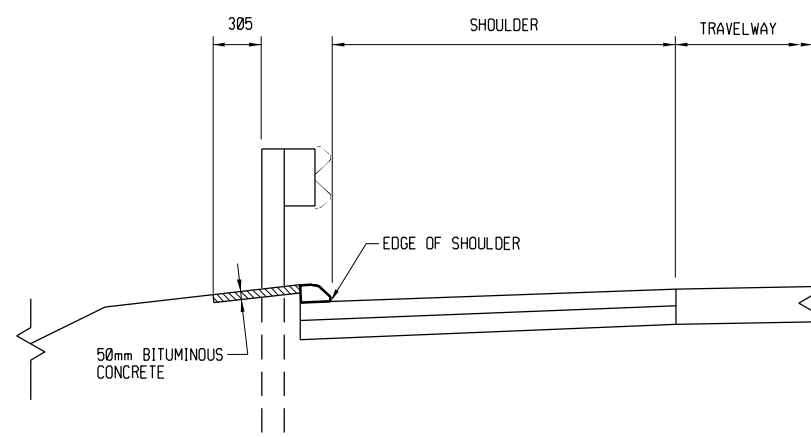


SECTION
RAIL WITH
100mm
MOUNTABLE
CURBING

A

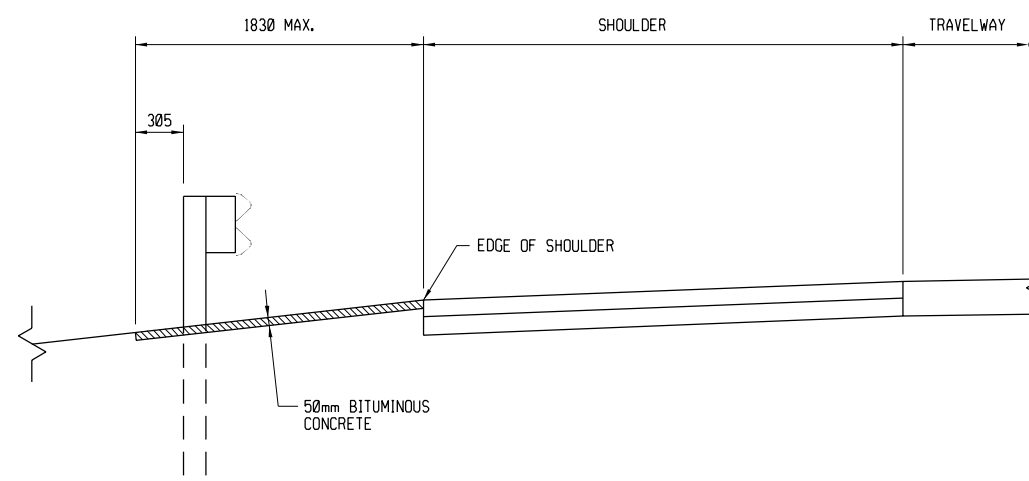

SECTION
RAIL WITHOUT
CURBING

B

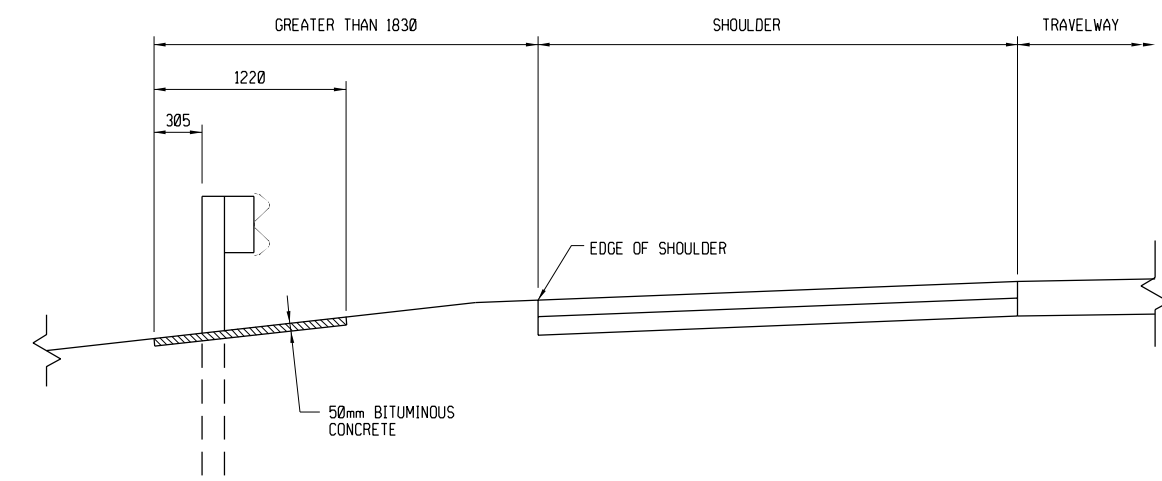

SECTION
TRANSITION OR
OFFSET RAIL

C

TYPICAL CROSS SECTIONS

GENERAL NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS (mm) UNLESS OTHERWISE NOTED.
2. PAVEMENT FOR RAILING SHALL BE USED ONLY AT THE FOLLOWING LOCATIONS:
 - a) WITHIN PUBLIC WATER SUPPLY WATERSHED AREAS.
 - b) AT THE APPROACHES TO BRIDGES OVER STREAMS AND RIVERS FOR A MINIMUM LENGTH OF 15m.
 - c) WHEN THE RIVER OR STREAM IS LESS THAN 15m FROM THE EDGE OF ROAD AND PARALLELING IT.

REVISION NO.	DATE	DESCRIPTION	SUBMITTED BY:	TIMOTHY M. WILSON	DATE:	04/19/04	CADD FILE:	m925a.dgn			DRAWING TITLE:	PAVEMENT FOR RAILING	STANDARD NO.: M925-A
			APPROVAL REC.	TRANSPORTATION PRINCIPAL ENGINEER	DATE:		DATE:	19-Apr-04					
				MANAGER OF DESIGN	DATE:		SCALE:						
			APPROVED:	TRANSPORTATION ENGINEERING ADMINISTRATOR	DATE:		NOT TO SCALE						
			F.H.W.A. APPROVAL:	DIVISION ADMINISTRATOR	DATE:		STANDARD DRAWING						